


DATA SHEET

# Modified lead titanate with high anisotropy type PZT

## Type Pz34

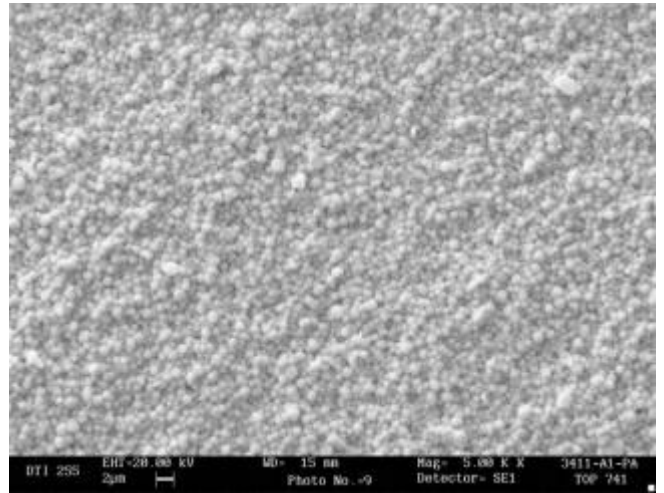

Microstructure of Pz34 at a magnification of 5000 times

### 01 Description

Pz34 is modified lead titanate exhibiting a large electromechanical anisotropy, low dielectric constant and properties which are very stable with time, temperature, and frequency. In contrast to other commercial lead titanates, Pz34 has an extremely small and uniform grain size. Pz34 is furthermore significantly more corrosion stable than other similar materials due to its unique chemical composition.

#### Repeatable performance

The main focus through our entire production process is to provide materials and components with the highest possible reproducibility of properties and parameters and to obtain the lowest aging rates in the industry.

Our materials have a variation of  $\pm 5\%$  for all parameters. This reduces the requirements for impedance matching, frequency tuning and dimensioning of the housing meaning fewer rejects and lower costs.

#### Customised solutions

We have more than 60 years of experience in the production of advanced piezoelectric ceramics. Our team has extensive expertise in customising designs to match the customer's needs.

Please contact us to discuss your requirements in further detail.

### 02 Key features and benefits

- Lowest batch to batch variation in the industry
- Stable material with consistent performance
- Customised or standard designs
- Large electromechanical anisotropy
- Low dielectric constant

### 03 Applications

- Single element medical transducers
- High-frequency ultrasonic transducers
- Pyroelectric sensors
- Low-frequency ultrasonics, where cross-coupling from radial modes must be avoided

### 04 Contact

Meggitt A/S

Tel: +45 49 12 71 00

E-mail: [pz@meggitt.com](mailto:pz@meggitt.com)

[www.meggittferroperm.com](http://www.meggittferroperm.com)

DATA SHEET

# Modified lead titanate with high anisotropy type PZT, Type Pz34

## 05 Material properties

### Electrical

Relative dielectric permittivity at 1 kHz  
Dielectric dissipation factor at 1 kHz  
Curie temperature  
Recommended working range

### Symbol

$K_{33T}$   
 $\tan\delta$   
 $T_C >$   
<

### Pz34

220  
 $14 \times 10^{-3}$   
400 °C  
150 °C

### Electromechanical

Coupling factors  
Piezoelectric charge coefficient

$k_p$   
 $k_t$   
 $d_{33}$

0.07  
0.42  
50 pC/N

### Mechanical


Mechanical Quality Factor  
Density

$Q_{m,t}$   
 $\rho$


>500  
7.65 g/cm<sup>3</sup>

Note: Due to continuous process improvement, specifications are subject to change without notice. Please be aware that extreme dimensions and geometries can lead to exaggeration in tolerances in all materials.

## 06 Technical performance

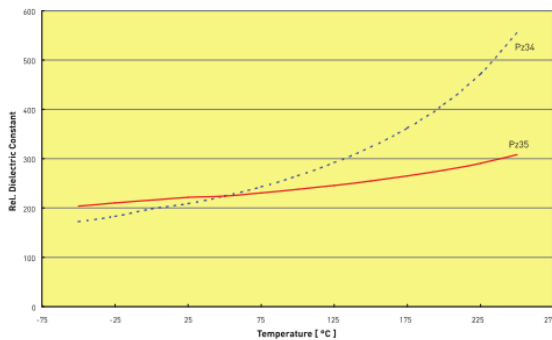

Temperature dependence of the free dielectric constant of Pz34 in comparison with another anisotropic material, Pz35, from Ferroperm

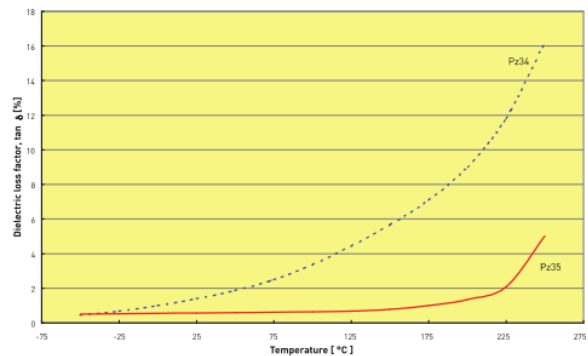

Temperature dependence of the dielectric loss,  $\tan\delta$ , Pz34 in comparison with another anisotropic material, Pz35, from Ferroperm.