


DATA SHEET

Very soft relaxor type PNN-PZT

Type Pz94

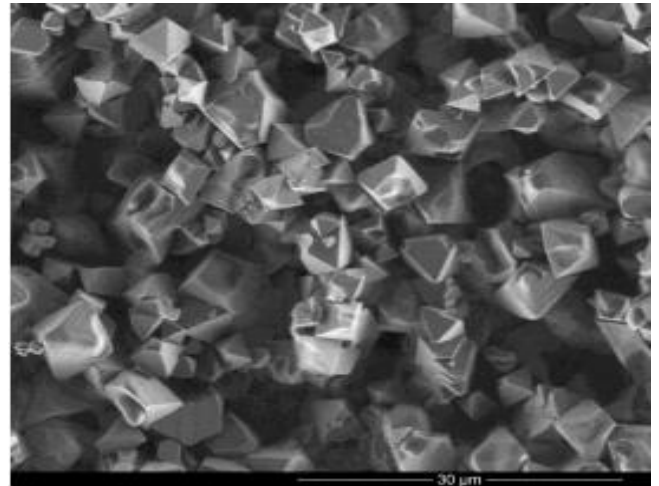

Microstructure of Pz94 at a magnification of 5000 times

01 Description

Pz94 is a very soft piezoceramic material with very high coupling factors and charge coefficients. The material is specially optimised for applications where high sensitivity, low porosity and small grain-size are required in combination with high reproducibility of the performance from batch to batch.

Repeatable performance

The main focus through our entire production process is to provide materials and components with the highest possible reproducibility of properties and parameters and to obtain the lowest aging rates in the industry.

Our materials have a variation of $\pm 5\%$ for all parameters. This reduces the requirements for impedance matching, frequency tuning and dimensioning of the housing meaning fewer rejects and lower costs.

Customised solutions

We have more than 60 years of experience in the production of advanced piezoelectric ceramics. Our team has extensive expertise in customising designs to match the customer's needs.

Please contact us to discuss your requirements in further detail.

02 Key features and benefits

- Lowest batch to batch variation in the industry
- Stable material with consistent performance
- Customised or standard designs
- High sensitivity
- Low porosity
- Small grain size

03 Applications

- 1D and 2D medical arrays for imaging systems
- Shear inkjet print heads
- High precision flow meters

04 Contact

Meggitt A/S

Tel: +45 49 12 71 00

E-mail: pz@meggitt.com

www.meggittferroperm.com

DATA SHEET

Very soft relaxor type PNN-PZT, Type Pz94

05 Material properties

Electrical	Symbol	Pz94
Relative dielectric permittivity at 1 kHz	K_{33T}	4300
Dielectric dissipation factor at 1 kHz	$\tan\delta$	25×10^{-3}
Curie temperature	$T_C >$	185 °C
Recommended working range	$<$	85 °C
Electromechanical		
Coupling factors	k_p	0.59
	k_t	0.46
	k_{33}	0.70
Piezoelectric charge coefficient	d_{33}	670 pC/N
Mechanical		
Mechanical Quality Factor	$Q_{m,P}^E$	60
Density	ρ	7.9 g/cm ³

Note: Due to continuous process improvement, specifications are subject to change without notice.
Please be aware that extreme dimensions and geometries can lead to exaggeration in tolerances in all materials.